


Aura Shower Kit

Shower ventilation



KEY FEATURES

- Axial in-line fan
- Designed for ventilation / lighting above shower cubicles
- Use for both supply or extraction
- Compact and quiet in operation
- Mounting bracket included
- Ductable
- LED light option
- IPX4 rating
- 3 year warranty



Aura Shower Kit range

Highly reliable fan in a modular design for ease of installation and maintenance. Aura In-Line fans are designed to provide extraction levels that comply with the latest Building Regulations.

The fans are manually operated by a remote switch (switch not supplied). Timer control versions are also available. Install in-line with ducting for a quiet and discreet installation.

The Aura In-Line fan comes with a fixing bracket and is compact, attractively styled and ideal for short duct runs. They are the ideal solution for removing damp moist air, odours and airborne pollutants from toilets and bathrooms.



ALWAYS PULL FLEXIBLE DUCTING TAUGHT TO ENSURE INSTALLED PERFORMANCE AIR FLOW.



MODELS

Basic	Control by Remote Switch
Timer	Adjustable timer overrun between 2 and 30 minutes

CONTENTS OF KIT


9041420	Aura 100B, 3 m flex duct, ties, extract valve, external grille
9041419	Aura 100T, 3 m flex duct, ties, extract valve, external grille
9041422	Aura 100B, 3 m flex duct, ties, LED lamp + chrome and white grilles, external grille
9041421	Aura 100T, 3 m flex duct, ties, LED lamp + chrome and white grilles, external grille

TECHNICAL DATA




Specification	Aura 100B Shower Kit	Aura 100T Shower Kit	Aura 100B Shower Kit With LED	Aura 100T Shower Kit With LED
Air flow m³/h / l/s	108 / 30	108 / 30	108 / 30	108 / 30
Fan type	Axial	Axial	Axial	Axial
Controls	Basic	Timer (adjustable)	Basic	Timer (adjustable)
Mounting	In-Line	In-Line	In-Line	In-Line
Sound pressure dB(A)@3 m	39	39	39	39
Power Watts	16	16	16	16
Amps	0.01	0.01	0.01	0.01
Specific Fan Power (SFP)	0.53	0.53	0.53	0.53
Duct diameter (mm)	100	100	100	100
Voltage	230 V / 1 ph / 50 Hz	230 V / 1 ph / 50 Hz	230 V / 1 ph / 50 Hz	230 V / 1 ph / 50 Hz
Rating	IPX4	IPX4	IPX4	IPX4
Material finish	ABS	ABS	ABS	ABS
Weight (kg)	0.41	0.41	0.41	0.41
Dimensions (H x W x D) mm	110 x 160 x 113	110 x 160 x 113	110 x 160 x 113	110 x 160 x 113
Part No.	9041420	9041419	9041422	9041421

DIMENSIONS (mm)

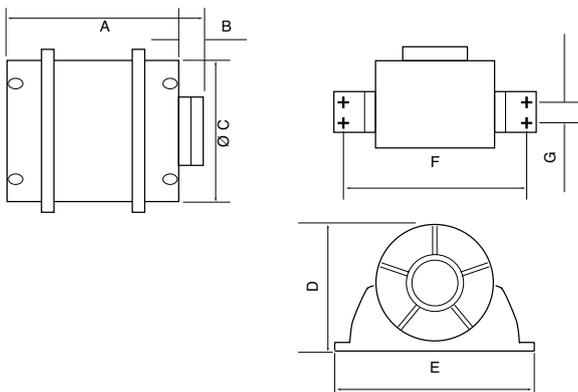

Model	A	B	C	D
Aura shower kit	110	113	160	144

PERFORMANCE

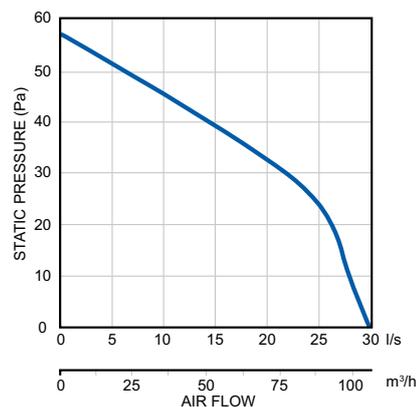

CONTROLS AND ACCESSORIES

A range of accessories including flexible and rigid ducting kits, controls, switches and grilles are available.

See accessories section for more details.

Call: 01494 525252

Visit: airflow.com



Airflow Developments Limited
Aidelle House, Lancaster Road,
Cressex Business Park,
High Wycombe, Buckinghamshire,
United Kingdom, HP12 3QP

E-mail: info@airflow.com
Telephone: +44 (0) 1494 525252

airflow.com

© Airflow Developments Limited. Airflow Developments Limited reserve the right, in the interests of continuous development, to alter specifications without prior notice. All orders are accepted subject to our conditions of sale which are available on request



80001386 Issue 1 - 06/23